2000 Perimetral Sliding System

A perimetral sliding system with the possibility of straight, bevelled and curved sashes.



2000 Perimetral Sliding System

Transmittance

Uw from 2.9 (W/m²K)

Please consult typology, dimensions and glass

Accoustic insulation

Maximum glazing: 0.67"

Maximum accoustic insulation **Rw=33 dBA**

Finishes

Colour powder coating (RAL, mottled and rough)
Wood effect powder coating
Anti-bacterial powder coating
Anodized

Categories achieved at test centre

Air permeability
(EN 12207:2000): Class 3

Water tightness
(EN 12208:2000): Class 8A

Wind resistance
(EN 12210:2000): Class C5
Reference test 47.24" x 47.24" 2 sashes




Sections

Frame 1.57" 1 rail
1.57" 1.77" 2.36" 2.76"
3.15" 3 rails
Sashes 1.02" (straight)
1.02" (chamfered)
1.08" (curve)

Profile thickness


Window 1,5 mm.
2 rails

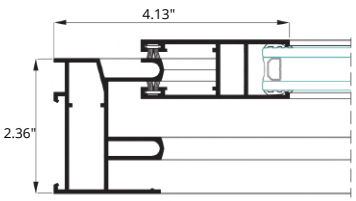





Opening possibilities

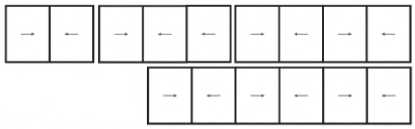

Sliding of 2, 3, 4 & 6 sashes.
Possibility of 3 rails.
Possibility of 1 rail.

Maximum dimensions

Width (L) = 125.98"
Height (H) = 102.36"
2 sashes window

Maximum weight/sash

100 Kg.

Please consult regarding maximum weight and dimensions for other opening types